



Protect Matte Floor Finish

Cera de Brillo Minimal

- Durable • Scuff Resistant
- Natural Low Gloss Protection



Technical Data Sheet

PRODUCT DESCRIPTION:

An acrylic polymer floor finish that provides a natural looking low gloss protection against foot traffic, abrasion and scuffing on stone and tile flooring.

USES:

Yields a natural low gloss on all types of stone and tile flooring.

ADVANTAGES:

Can be applied and reapplied without redoing the entire floor. Dries to a durable matte finish without buffing, resists scuffs and scratches, resists powdering, slip resistant, fast drying, detergent resistant.

SPECIFICATIONS:

- Total Solids: 20%
- pH: 7-8
- Color: Off White
- Solubility in Water: Mixes
- Odor: Acrylic
- Flash Point: None
- Viscosity: Thin Liquid
- Weight per Gallon: 8.6 Lbs.

PRODUCT/CONTAINER

DISPOSAL:

Dispose of used/unwanted product according to state and local regulations. Offer container for recycling.

SIZES AVAILABLE:

1 Gallon Bottle, 5 Gallon Pail, 30 & 55 Gallon Drums.



Recyclable packaging

DIRECTIONS FOR PRODUCT USE:

INITIAL APPLICATION

1. Remove all old wax and floor finish with appropriate stripper.
2. Rinse the floor thoroughly (at least twice) with clean water.
3. Repeat steps 1-2 if all old finish is not removed. Allow floor to dry.
4. Apply 3-4 thin coats using a clean synthetic mop, allowing a minimum of 30 minutes between coats.
5. Apply additional coats in same manner, allowing at least 30 minutes drying time between coats.
6. For very porous floors, an initial coat of floor sealer is recommended.

NOTE: Temperature, humidity and air movement affect curing time. To avoid contamination, do not return any used material to original container.

ROUTINE MAINTENANCE

1. Sweep up large debris and dust mop using a water-based treatment.
2. Damp mop or autoscrub using a neutral pH cleaner.
3. If reapplication is necessary, top scrub the floor to remove the top soiled layer of finish.
4. Rinse and allow to dry before applying additional coats as directed above.


FOR PROPER PERFORMANCE USE ONLY WHEN PRODUCT TEMPERATURE AND FLOOR TEMPERATURE ARE 50° F OR HIGHER.

WARNING: Do not allow wet floor areas to be open to foot traffic. Wet shoes or wet spots can create a slippery condition. Wet floor areas should be cordoned off until dry for traffic.

Coverage: 2000-2500 square feet per gallon



It is recommended that protective gloves and safety glasses be worn when using this and all cleaning products. Refer to MSDS for further safety information.

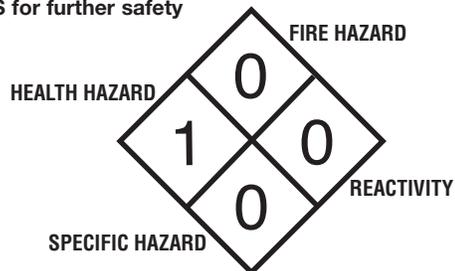

MANUFACTURED BY:



AMERICAN Cleaning Solutions
Division of American Wax Company, Inc.

39-30 Review Avenue
Long Island City, New York 11101
1-888 WAX PLUS • (718) 392-8080 Fax: (718) 482-9366
Visit us on the web! www.cleaning-solutions.com

