


SAFEWAZE
SAFELINK™

FS-EX2516
SafeLink 5/16" Double-Saddle
Fist-Grip Clamp

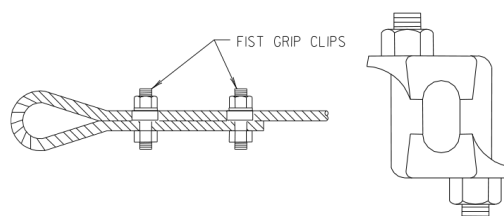

Description 5/16" Double-Saddle Fist-Grip Clamp for use with the SafeLink Horizontal Lifeline System. Two pieces per connection required. 5" cable turnback; 30 lbf torque for nuts. Install first clip as close to the loop or thimble as possible. Tighten nuts evenly and alternating until recommended torque is achieved. 2nd clip approximately 1 inch from "dead" end. Always check torque periodically.
See SafeLink User Manual for installation instructions

Overall Length 2 in (50.8 mm)

Width at Widest Point 1 in (25.4 mm)

Material Drop-forged steel; hot-dipped galvanized

Locking Mechanism Two nuts torqued to 30 lbf when installed

Testing 100% Proff Tested

Minimum Breaking Load 5,000 lbs (2267.96 kg)

Applicable Standards Meets OSHA 1926.502, ANSI Z359.12-2009, ANSI A10.32