


## UNDERCUT 100° FLAT HEADS FOR MACHINE SCREWS

Nominal Size	A		H		R		Phillips Driver Size
	Head Diameter		Head Height		Recess Depth		
	Max	Min	Max	Min	Max	Min	
4	.212	.188	.047	.038	.071	.055	1
6	.262	.235	.059	.048	.067	.044	2
8	.312	.282	.070	.058	.095	.072	2
10	.362	.329	.081	.068	.110	.087	2
12							

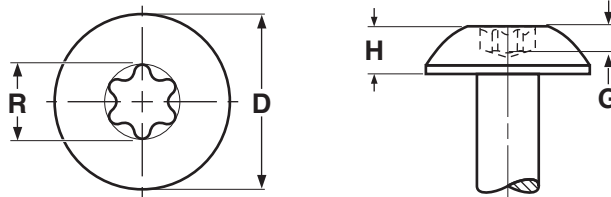

## TORX® DRIVE TRUSS HEADS

Camcar

Screw Size	D		H		R	G	Driver Size	
	Head Dimensions				Recess Dimensions			
	Head Diameter		Head Height		Ref	Gauge Penetration Min		(Fallaway) Max Penetration
	Max	Min	Max	Min				
4	.219	.205	.080	.070			T9	
6	.270	.256	.097	.087	.111	.035	.022	T10
8	.322	.306	.115	.105	.132	.045	.026	T15
10	.373	.357	.133	.122	.155	.055	.031	T20
12	.425	.407	.151	.139	.178	.070	.036	T25
1/4	.492	.473	.175	.162	.200	.070	.040	T27
5/16	.615	.594	.218	.203	.266	.105	.047	T40
3/8	.740	.716	.261	.244	.312	.130	.055	T45