
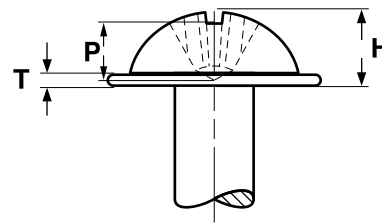


TORX® 100° FLAT HEAD FOR MACHINE SCREWS							Camcar Textron
Nominal Size	T	G		M	F	Fallaway Maximum Penetration of No-Go Gauge	Driver Size
	Head Height	Head Diameter		Recess Diam.	Gauge Penetration		
	Ref	Max Sharp	Abs. Min	Ref	Ref	Max	
4	.049	.225	.191	.094	.020	.019	T8
6	.060	.279	.238	.111	.035	.022	T10
8	.072	.332	.285	.132	.046	.026	T15
10	.083	.385	.333	.155	.056	.031	T20
1/4	.110	.507	.442	.221	.085	.044	T30
5/16	.138	.635	.556	.266	.092	.047	T40
3/8	.165	.762	.670	.312	.110	.055	T45



PHILLIPS ROUND WASHER HEADS FOR MACHINE SCREWS										ASME B18.6.3 2002		
Nominal Size	R	H		W		T	D	P	N	Recess Penetrating Gaging Depth		Driver Size
	Crown Diam.	Head Height		Washer Diameter		Washer Thickness	Recess Diam.	Recess Depth	Recess Width	Max	Min	
	Ref	Max	Min	Max	Min	Ref	Ref	Ref	Ref	Max	Min	
4	.177	.079	.067	.261	.243	.030	.116	.062	.019	.065	.044	1
6	.218	.096	.084	.321	.301	.040	.147	.058	.026	.061	.033	2
8	.259	.113	.101	.380	.358	.040	.161	.073	.028	.076	.048	2
10	.300	.130	.118	.439	.416	.050	.177	.091	.029	.093	.066	2
12	.341	.148	.134	.498	.473	.050	.228	.097	.030	.094	.066	3
1/4	.396	.170	.157	.576	.548	.050	.244	.110	.032	.107	.080	3
5/16	.494	.211	.197	.719	.687	.060	.292	.160	.038	.156	.129	3